



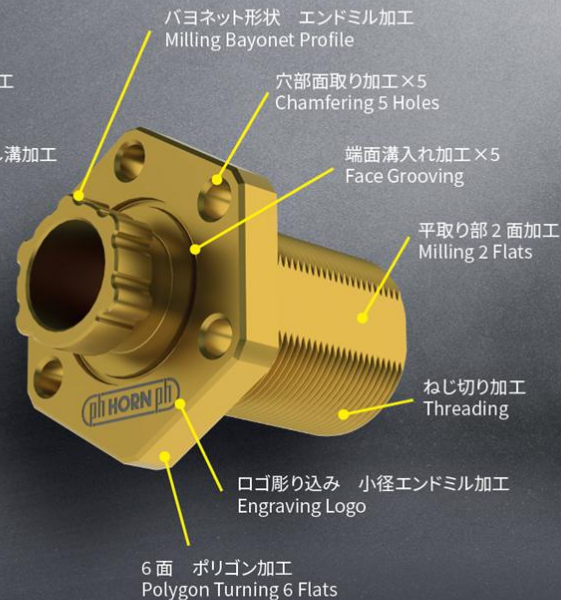

ELECTRO CONNECTOR




Citizen L20 3M8 LFV

外径横引き加工

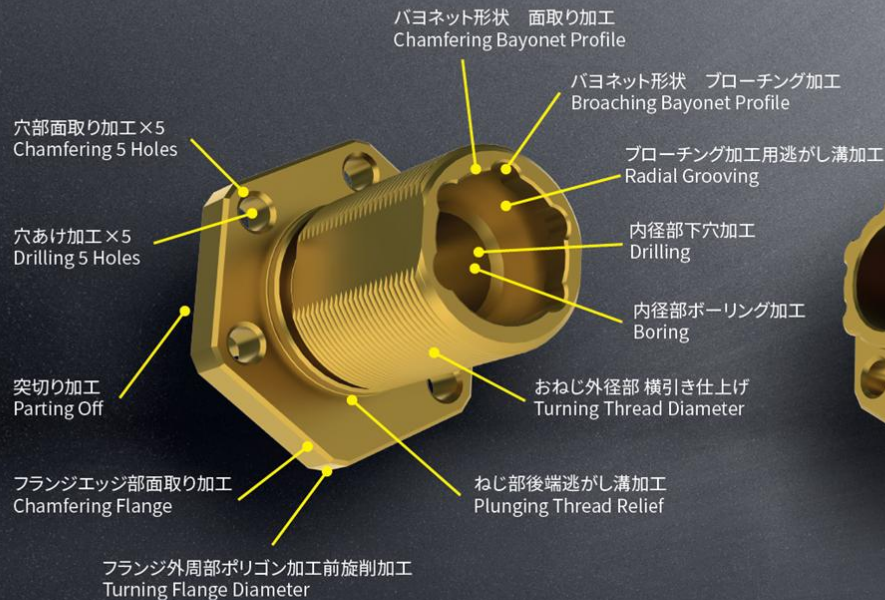

型式 RS274.0535.06.20 TH35

仕様 $w = 4.1\text{mm}$

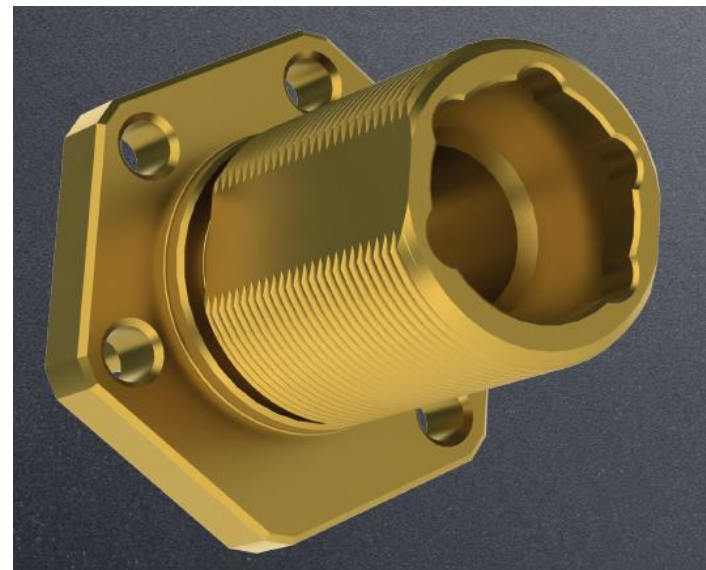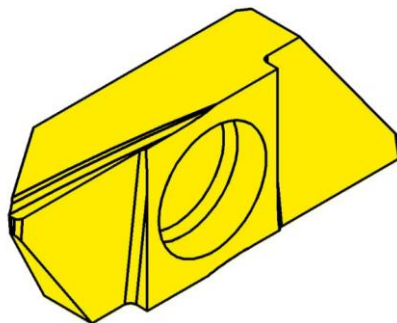
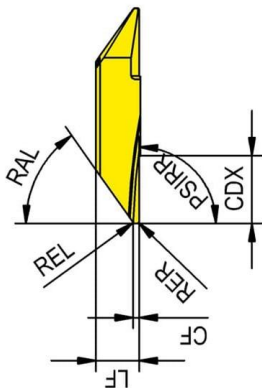


ねじ部後端逃がし溝加工



型式 RS274.0100.3.1A.05 IG35 焼結チップブレーカー付き

仕様 w=1.0 mm


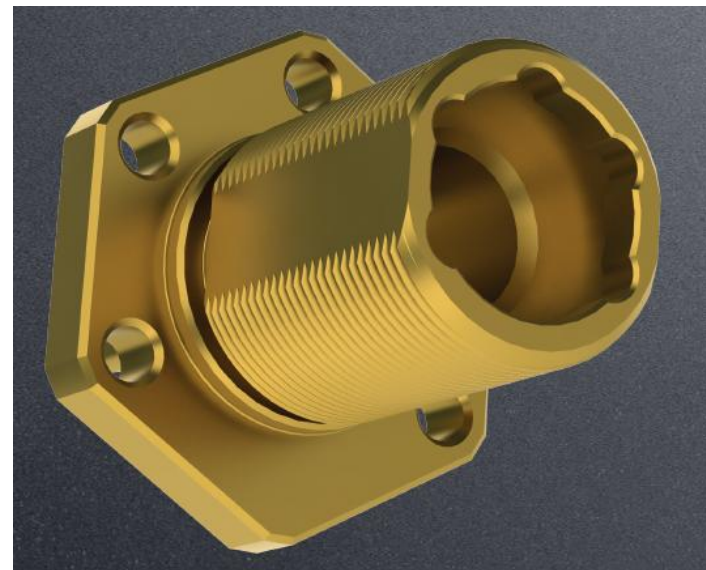
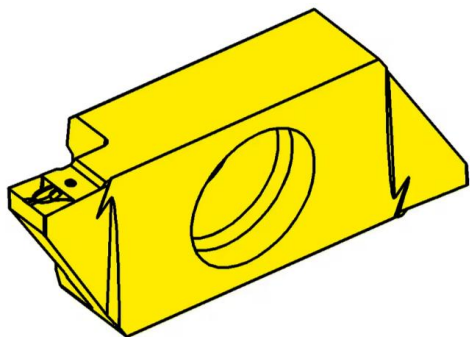


6面 ポリゴン加工



型式 RS275.MK13.M0 AS45

仕様 w=3.9 mm

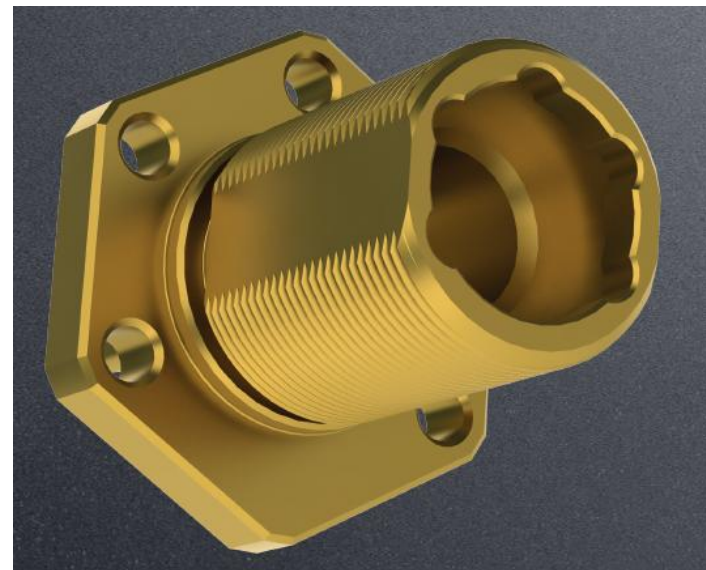
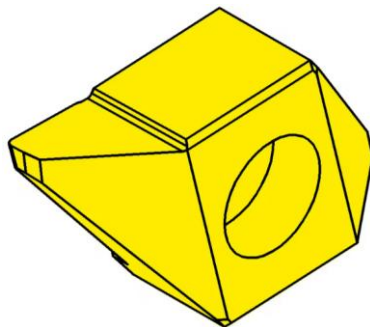
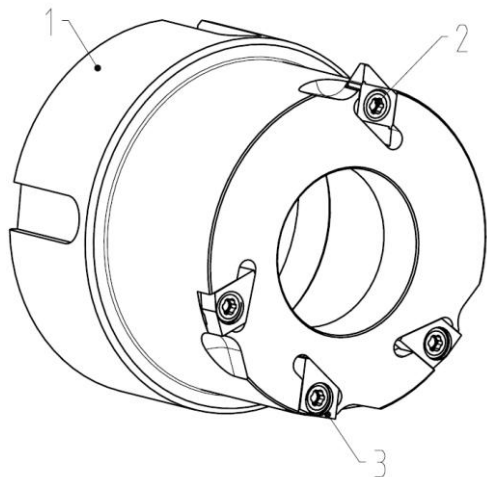


平取り部 2 面加工



型式 611.PL61.62 TI25

仕様 刃先径 ϕ 17.7 mm

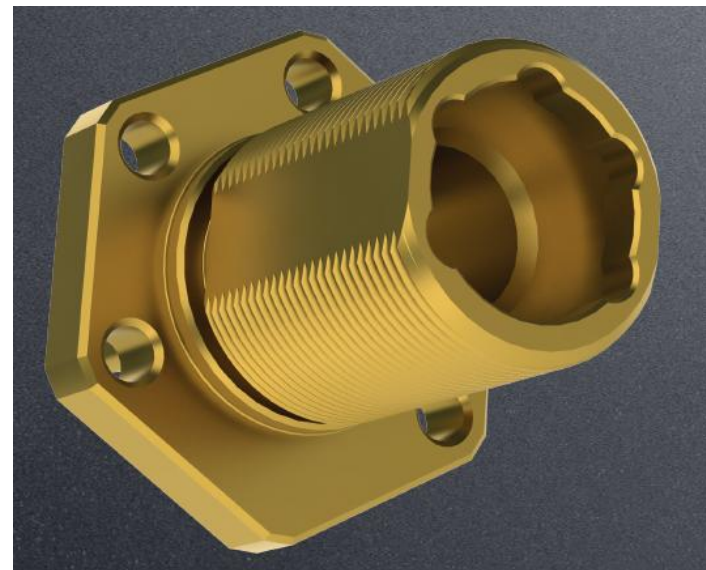
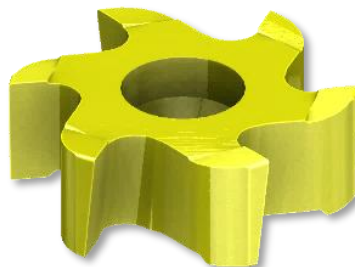
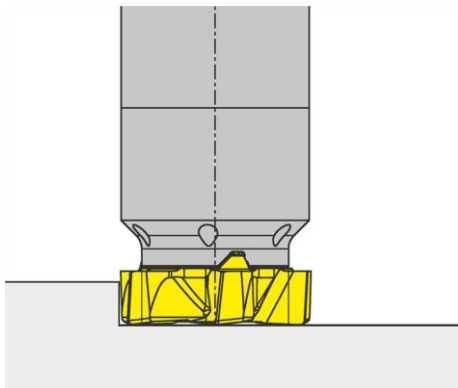


ねじ切り加工



型式 RS274.0610.02 TH35



仕様 ピッチ 1 mm

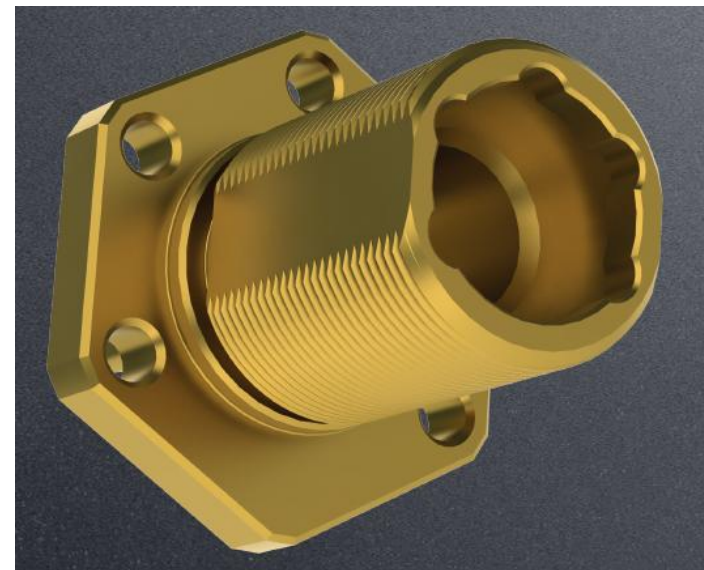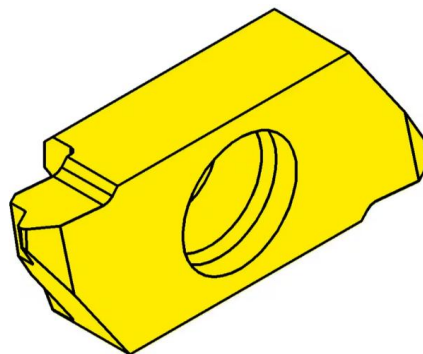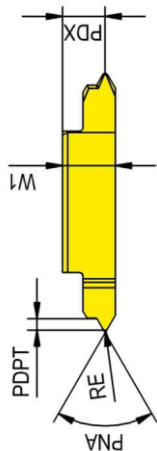

穴あけ加工

型式 D1122.03.A0500C ES35

仕様 刃先径 $\phi 6.0$ mm 有効長 20 mm


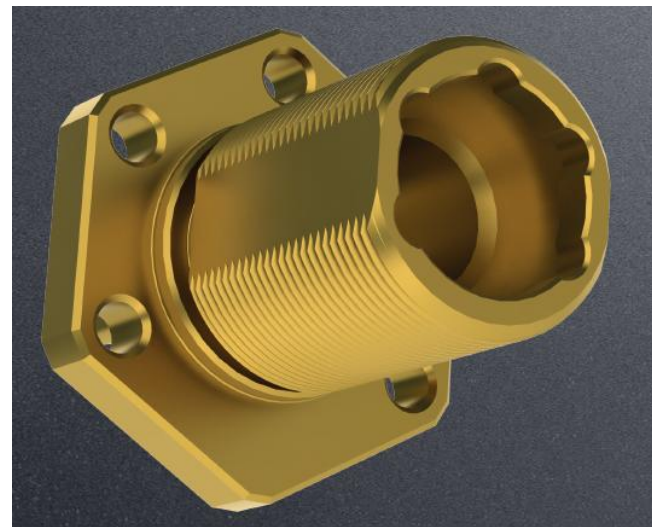
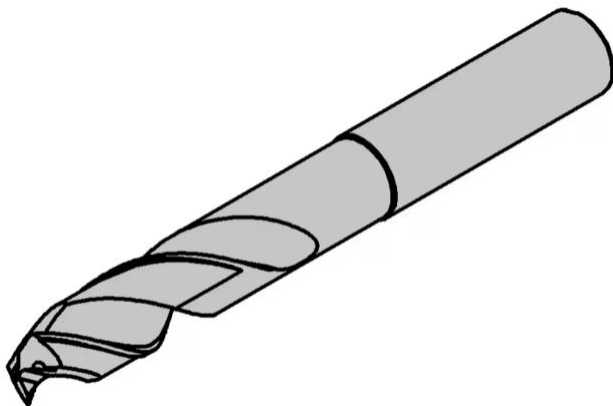


ボーリング加工



型式 RS105.1833.4.5.U20 IG35 焼結チップブレーカー付き

仕様 対応下穴径φ5.0～

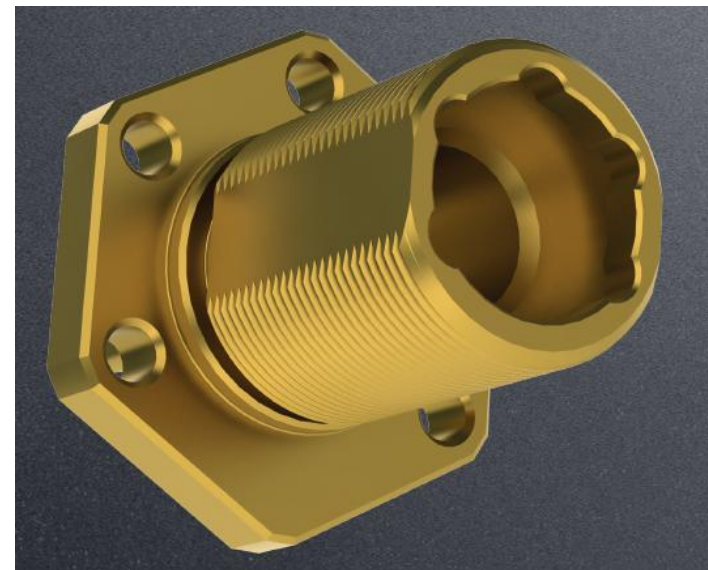

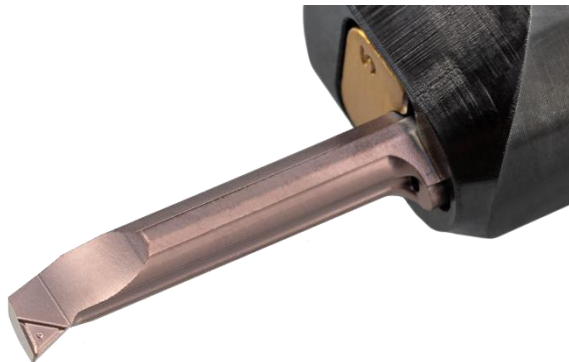


逃がし溝加工（ブローチング用）



型式 R105.0200.2.6 TH35

仕様 w=2.0 mm

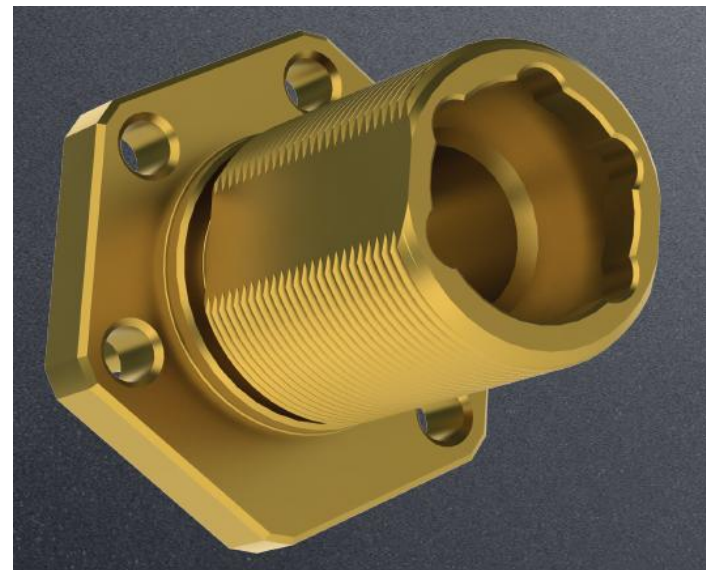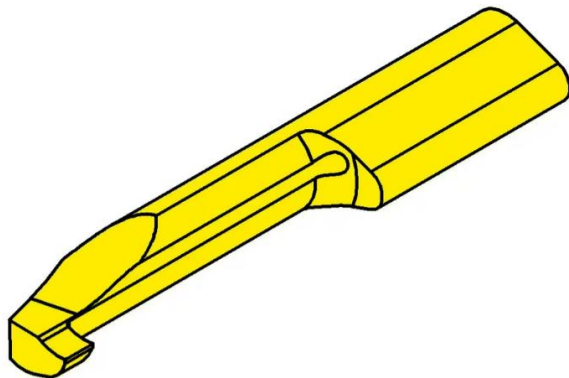



バヨネット形状 ブローチング加工



型式 N105.0100.4553 EG35


仕様 刃先径 $\phi 12$ mm

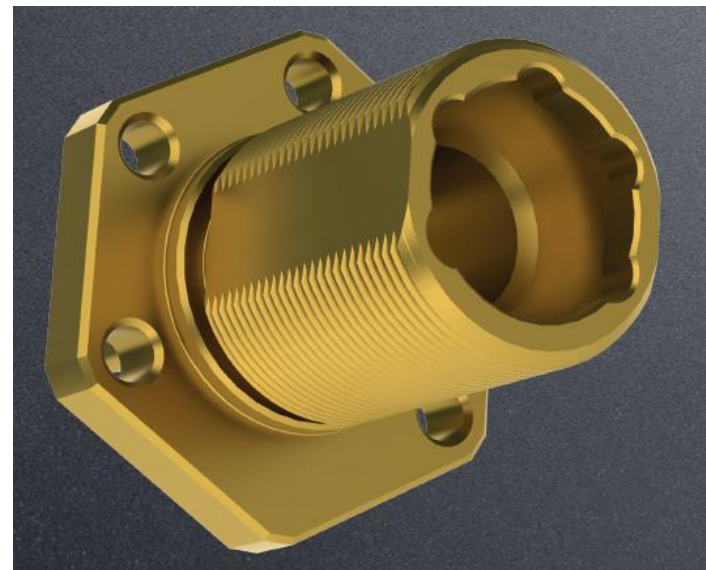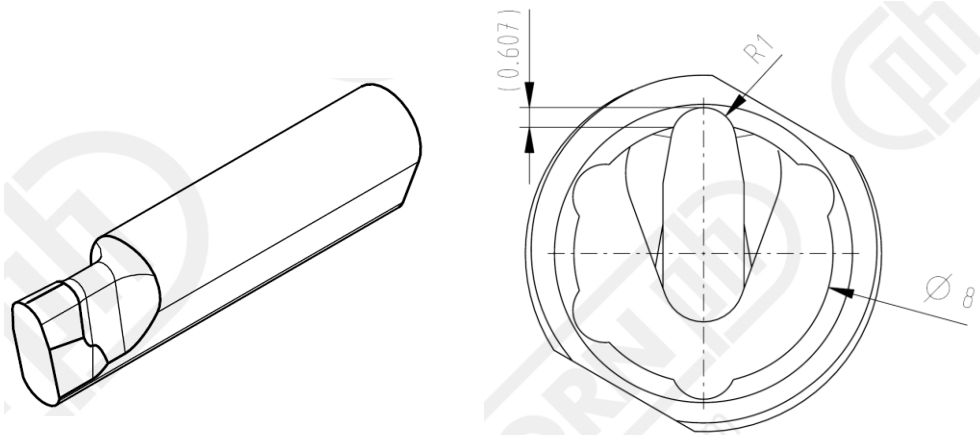

バヨネット形状面取り加工



型式 **エンドミル DPFF.4.04.020.090 TF2K**
仕様 **刃先径φ4.0 mm**


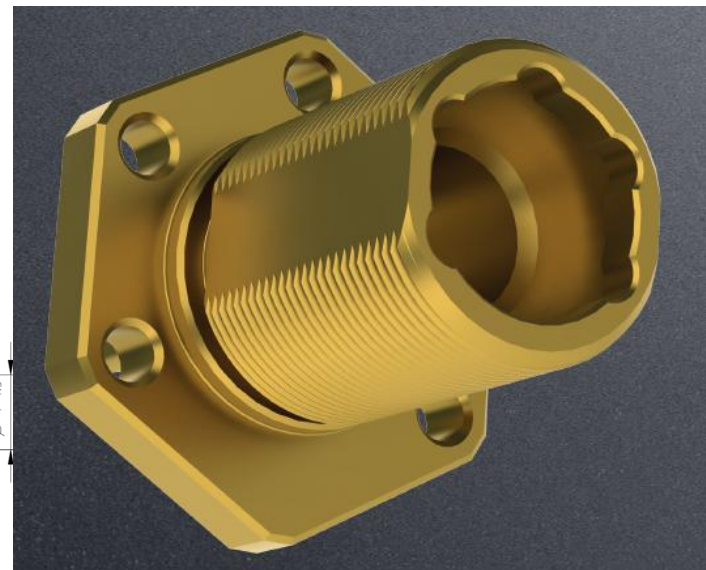


旋削加工



型式 RS274.0200.6.1A.05 IG35 焼結チップブレーカー付き

仕様 w=2.0 mm


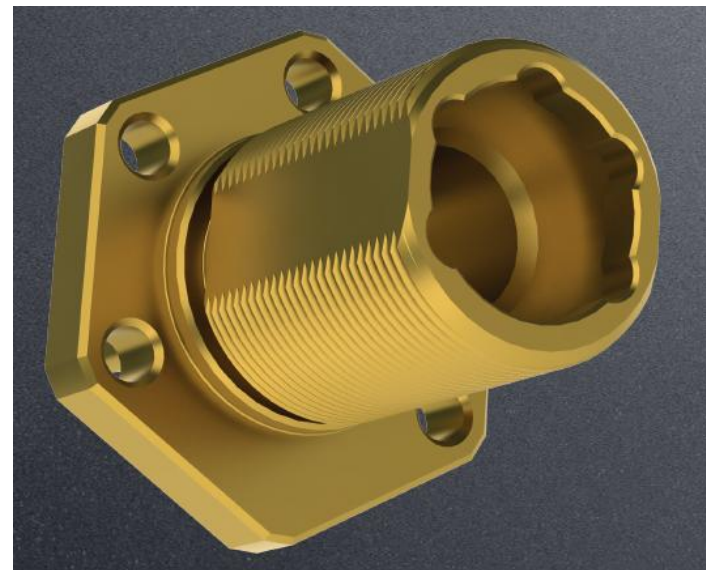
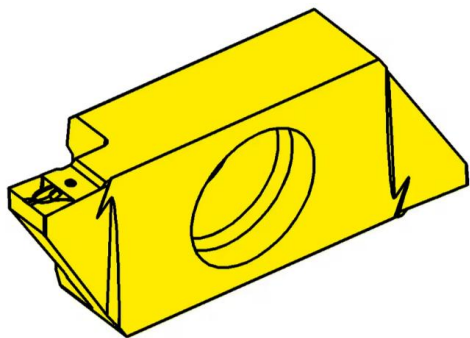


突切り加工



型式 LS224.0520.F2 TF45

仕様 刃先径 $\phi 40$ mm

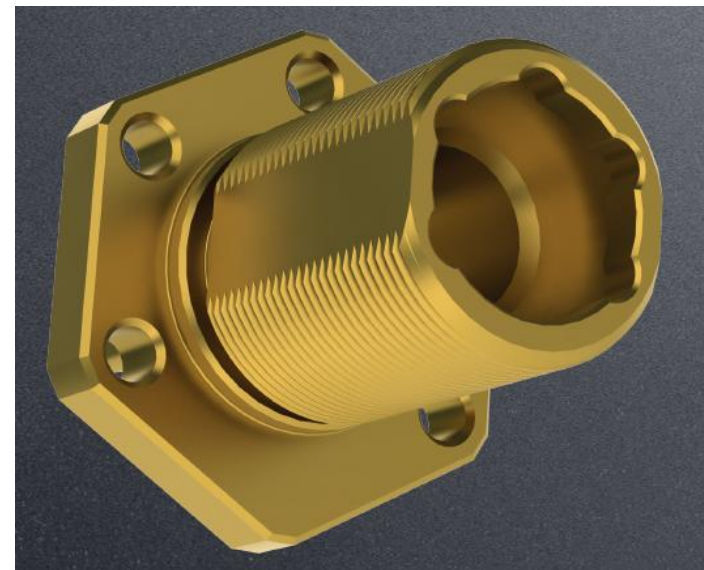
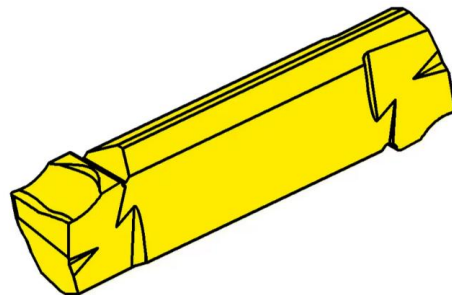
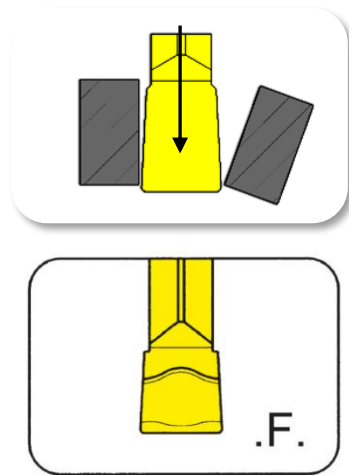


端面溝入れ加工



型式 R105.0810.1.9 EG35

仕様 $w=1.0\text{mm}$

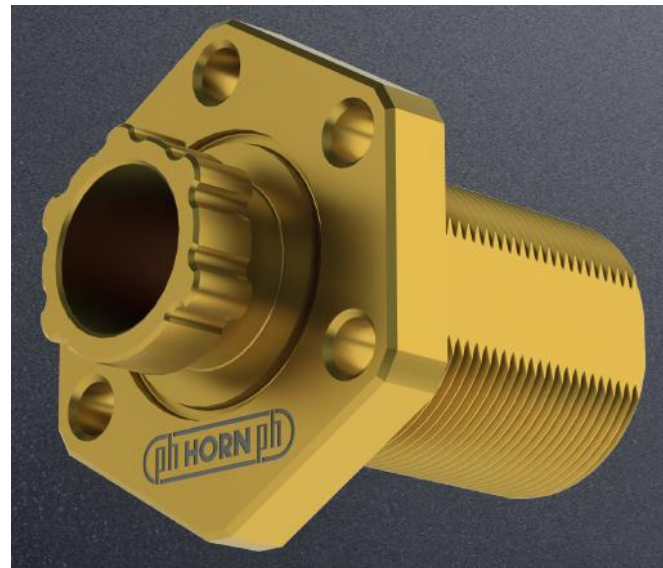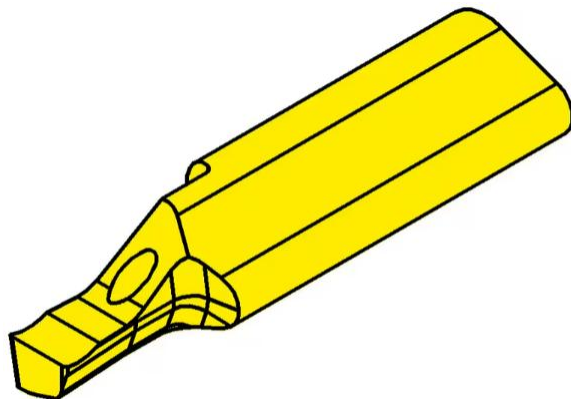



バヨネット形状 エンドミル加工



型式 DSTM.4.100.000.050 TS3K

仕様 刃先径 $\phi 1.0$ mm 4枚刃

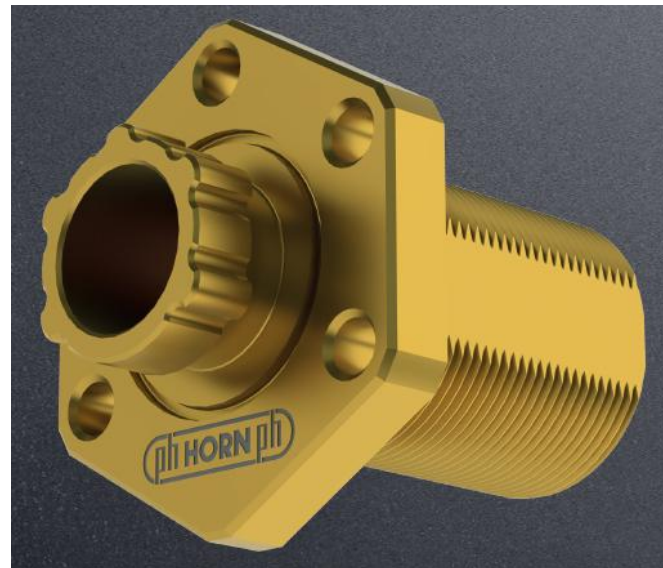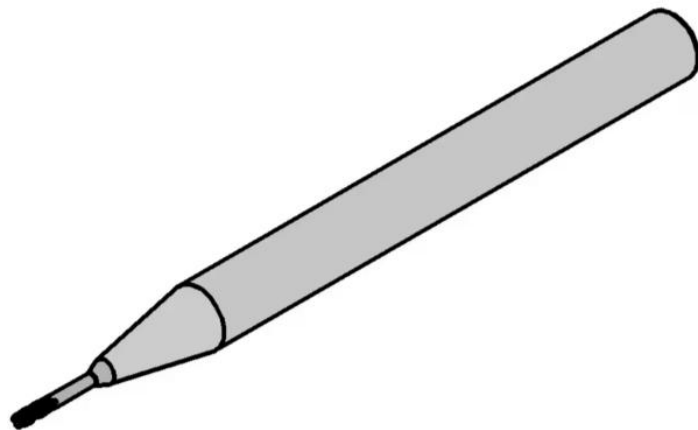

ロゴ彫り込み 小径エンドミル加工



型式 DSKM.2.020.030 TS3K

仕様 刃先径 $\phi 0.2$ mm 有効長 0.4 mm 2枚刃

