


高送り正面フライス加工



型式 620.HV08.04 AS45

仕様 刃先径 $\phi 21.7$ mm


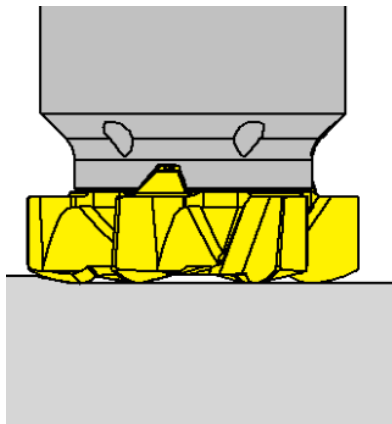


正面フライス加工



型式 620.PL53.64 AS45

仕様 刃先径 $\phi 21.7$ mm

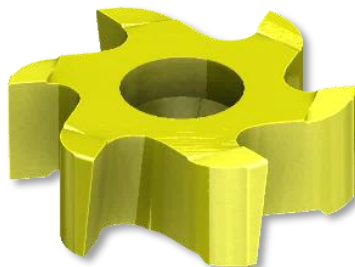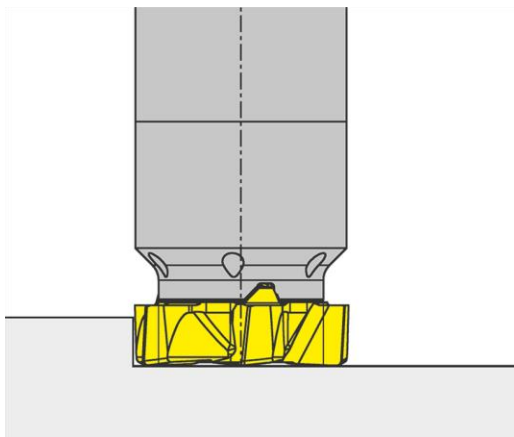


仕上げエンドミル加工



型式 DSM.8.160.30 TS3K

仕様 刃先径φ16 mm 刃先 48mm


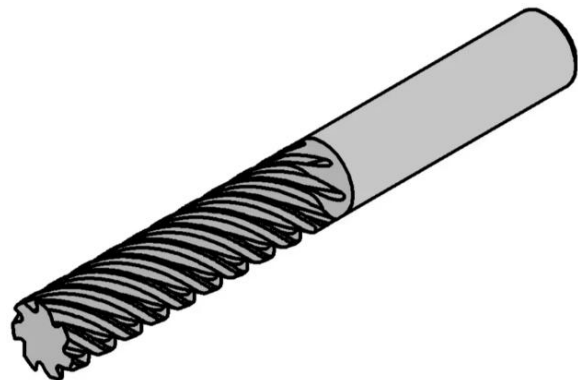


プランジ・ヘリカル・溝加工



型式 325.0350.52 AS45

仕様 刃先径 ϕ 24.8 mm

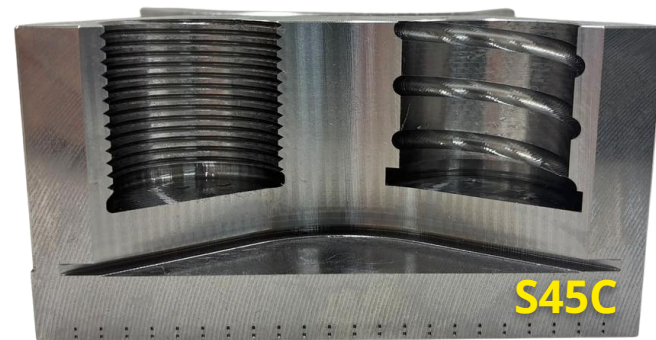
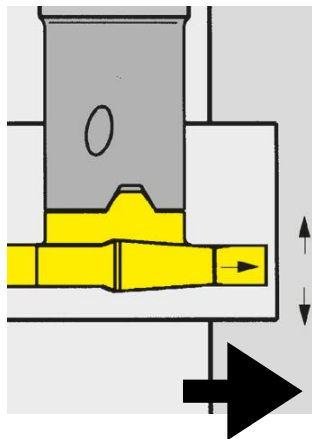


ねじ切り用逃がし溝加工



型式 611.1725.61 EG55

仕様 刃先径 ϕ 17.7 mm

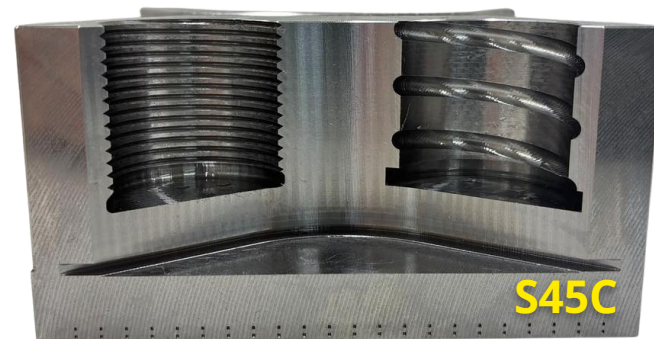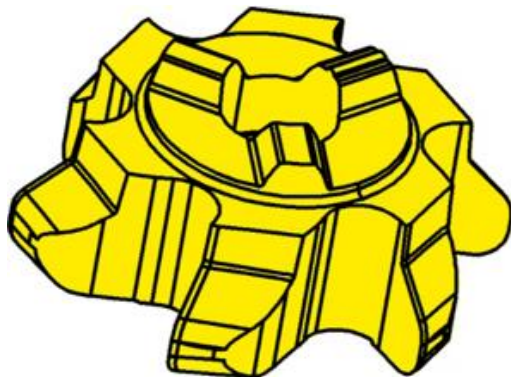


油溝加工



型式 311.0015.30 AS45

仕様 刃先径 ϕ 17.7 mm

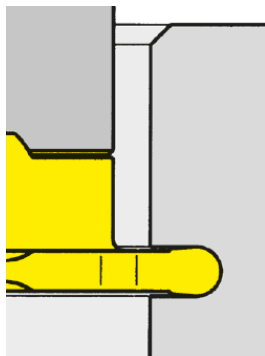


ねじ切り加工



型式 611.0720.01 AS45

仕様 刃先径 ϕ 17.7 mm ピッチ 1.0

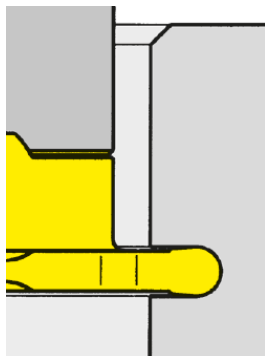


2mm幅 溝入れ加工



型式 313.0200.00 AS45


仕様 刃先径 $\phi 21.7$ mm w=2.0 mm

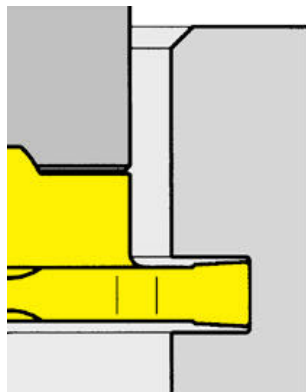

エンドミル加工（Tスロット用）

型式 DSHPC.4.120.030.21 ES3P

仕様 刃先径 ϕ 12 mm



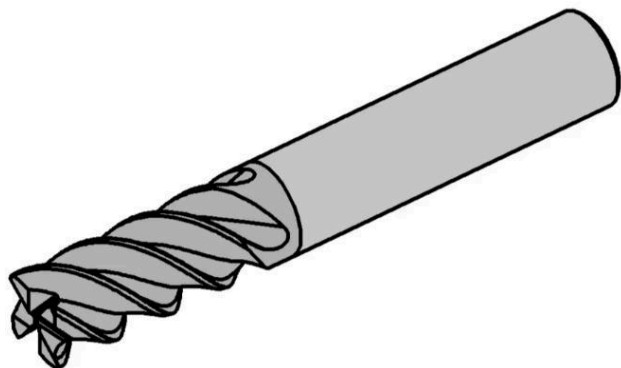


Tスロット溝加工



型式 313.1219.1.00 RC45

仕様 刃先径 $\phi 20$ mm

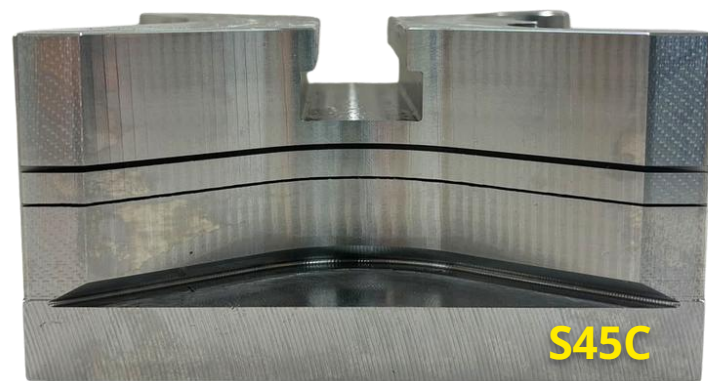

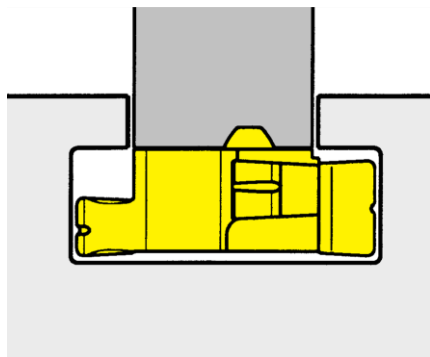


Tスロット溝加工



型式 313.1219.1.00 RC45

仕様 刃先径 $\phi 20$ mm

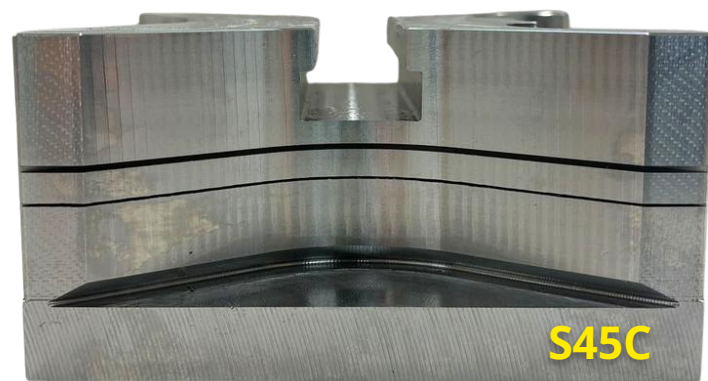

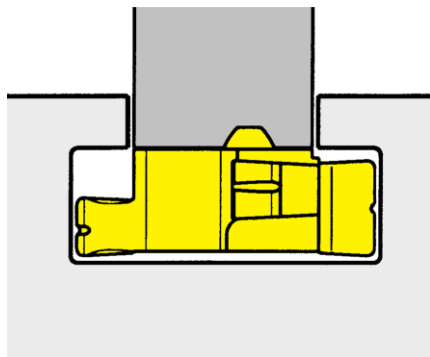


Tスロット溝加工



型式 313.1219.1.00 RC45

仕様 刃先径 $\phi 20$ mm


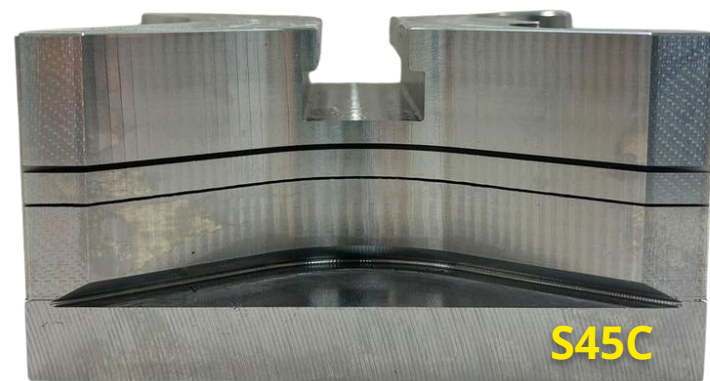

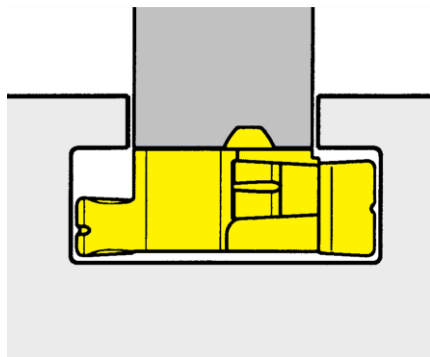


1mm幅 溝入れ加工



型式 939.0100.4.00 RC25

仕様 刃先径 $\phi 40$ mm

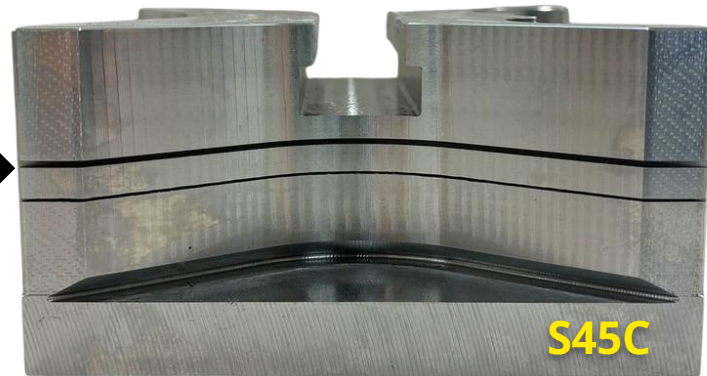





0.4mm幅 溝入れ加工



型式 939.0040.4.00 RC25

仕様 刃先径 $\phi 40$ mm

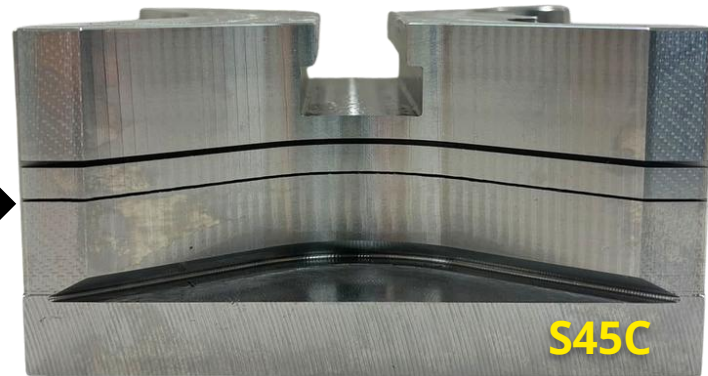



S45C

45°溝加工



型式 613.0045.25 AS45

仕様 刃先径 ϕ 21.7 mm

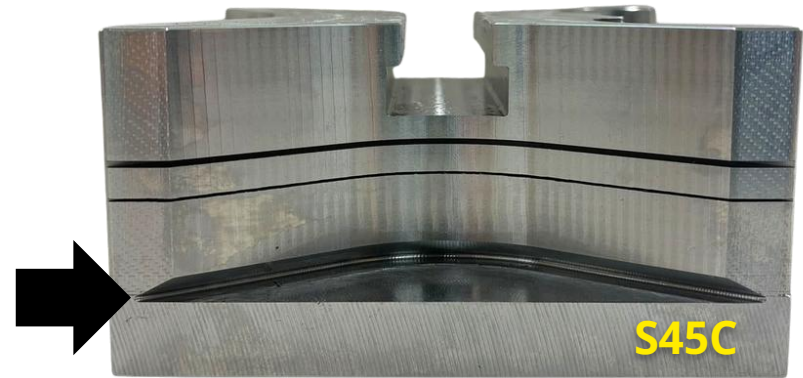
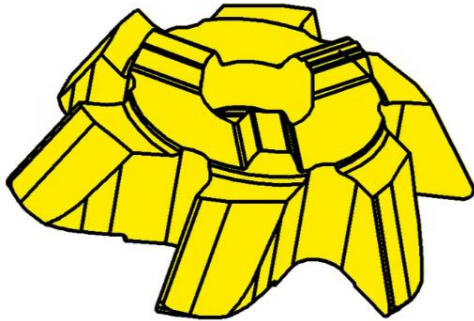


45°溝加工



型式 328.4545.35.00 TA45

仕様 刃先径 ϕ 27.7 mm



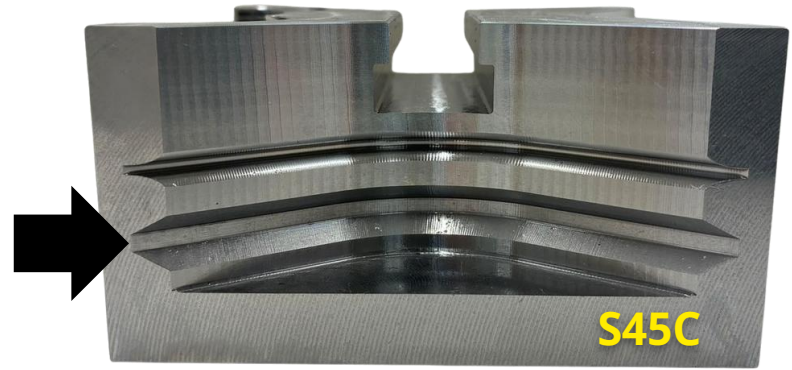
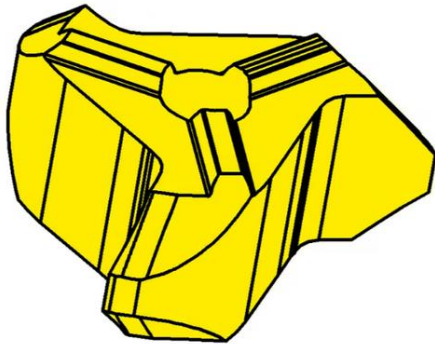


R3.0 溝加工



型式 613.R300.00 AS45

仕様 刃先径 $\phi 21.7$ mm

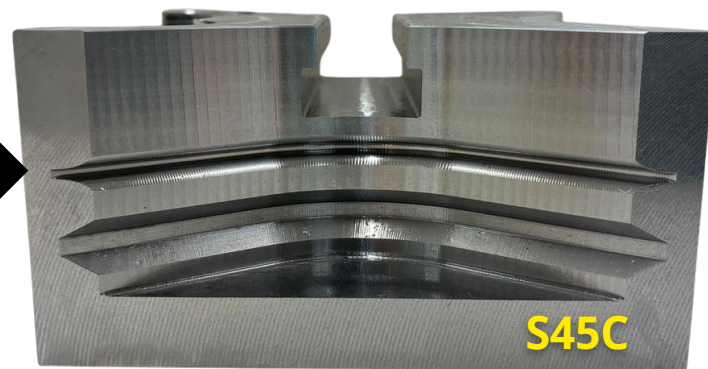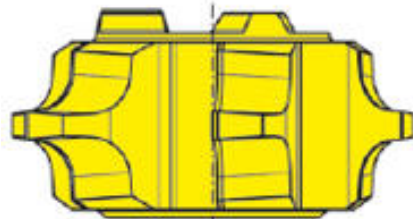
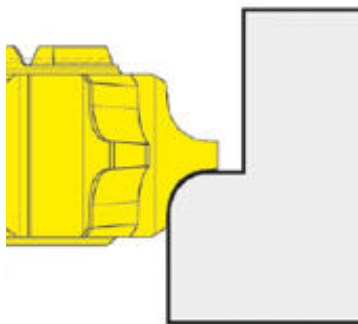


正面フライス・バリ取り加工



型式 620.PL53.64 AS45

仕様 刃先径 $\phi 21.7$ mm

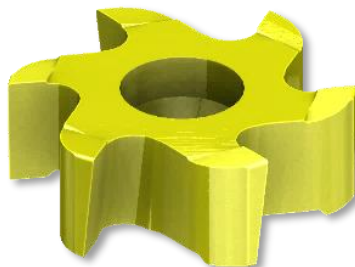
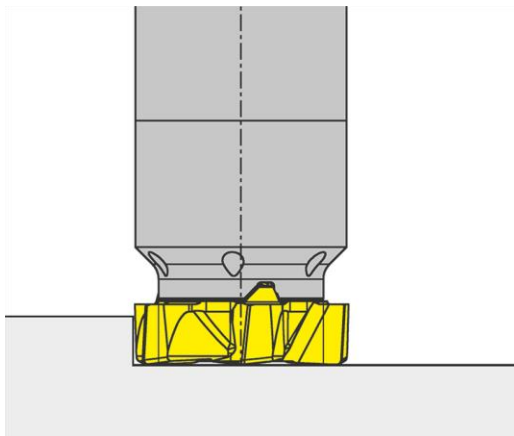


正面フライス・バリ取り加工



型式 620.PL53.64 AS45

仕様 刃先径 $\phi 21.7$ mm

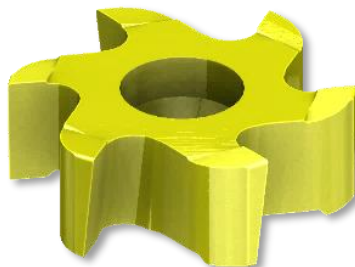
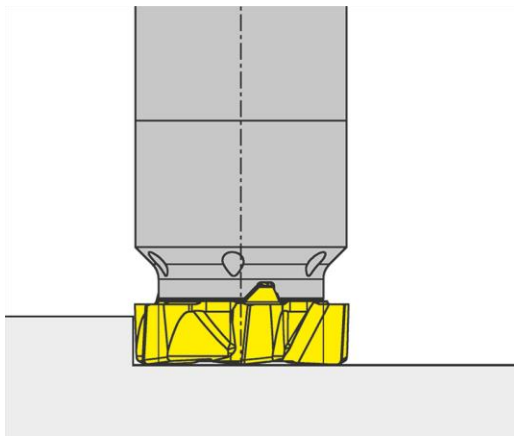


45°面取り加工



型式 311.4545.20 TN35

仕様 刃先径 ϕ 15 mm

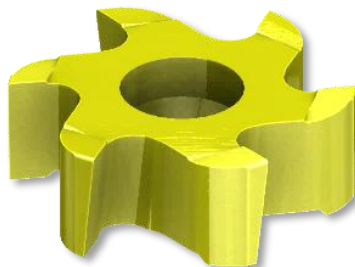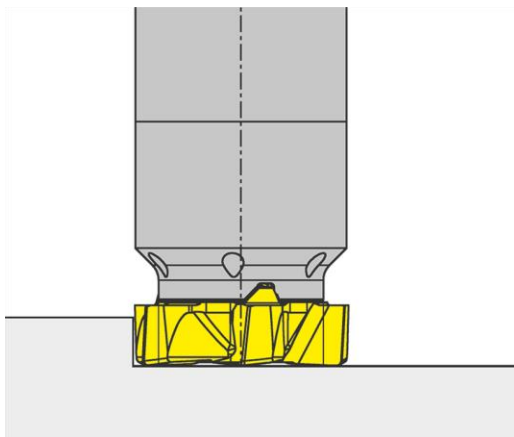

壁面仕上げエンドミル加工



型式 DSM.8.160.30 TS3K

仕様 刃先径 ϕ 16 mm

